

unilink 4411 ht

article no.: 2971


Version 02/ 28.09.2011
 Supersedes Version 01/ 14.12.2009

unilink 4411 ht is a double coated adhesive tape with an excellent stability and bonding strength.

The solution for laminating a variety of substrates with smooth and rough or structured surfaces.

The polyester based carrier provides outstanding dimensional stability, converting and die-cutting possibilities and can provide a migration barrier.

Tape Construction

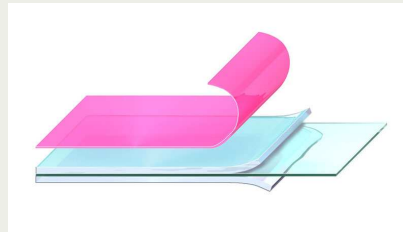

Siliconpaper, yellow,
 both sides silicone coated,
 weight: 90 g/m²

modified acrylate
 coat weight: 100 g/m²

Polyester film, transparent
 thickness: 23 µm

modified acrylate
 coat weight: 100 g/m²

Tape Thickness

approx. 0,22 mm excl. liner

Adhesion [N/25mm]

In accordance to AFERA 5001

steel	30	PMMA	25
aluminium	28	PVC	21
glass	26	PP	24
		PE	13

Cohesion [N/625mm²]

In accordance to AFERA 5012

20° C	45	70° C	10
-------	----	-------	----

Temperature Resistance

- 40°C to +120°C, short term even up to +200°C

Storage. This product should be stored at ambient temperatures of around 20°C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%. In ideal storage conditions, the shelf life of this material will be approx. 12 months from the delivery date. Within this 12 month period, when stored correctly, there should be no deterioration of the products published performance specification.

Product use. All statements, technical info contained herein are based on lab testing, we believe to be reliable. In reality, many factors beyond our control can affect and influence the use and performance of our products on any particular application. Since these factors are uniquely within the users knowledge and control, it is essential that the user evaluate the product to determine its suitability for purpose. Biolink will not be liable for any loss or damage arising, whether direct or indirect, special, incidental or consequential.

All data above mentioned and technical information given above are typical values, gained from tests we believe to be reliable. Please ensure before using. Our product that it is suitable for the material for intended application. For technical assistance please call our product specialists. The data and statements are intended as a source of information, are given without guarantee and do not constitute a warranty. They can vary according to the application conditions. All materials described herein are subject to our conditions of sale, a copy is available on request.