

netlink 150 hs

article no.: 4614


Version 03/ 28.09.2011
 Supersedes Version 02/ 26.08.2010

netlink 150 hs is a high quality, highly multifunctional double sided, scrim reinforced transfer adhesive.

The scrim reinforcement adds good dimensional stability to this highly aggressive adhesive, without losing any of the products conformability. It is therefore, a perfect solution for laminating, fixing and mounting of structured, rough surfaced substrates, where dimensional stability is required to eliminate stretching during final application.

The hs adhesive is designed to provide a high performance solution for fixing, mounting and laminating of foams, plastics, rubbers, vinyl, textiles and films.

Tape Construction

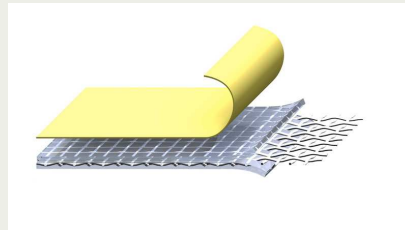

PE- paper, white,
 both sides silicone coated,
 weight: 120 g/m²

Modified acrylate
 coat weight: 150 g/m²

Polyesterscrim, white

Tape Thickness

approx. 0,16 mm excl. liner

Adhesion [N/25mm]

In accordance to AFERA 5001

steel	36	PMMA	36
aluminium	35	PVC	35
glass	35	PP	33
		PE	23

Cohesion [N/625mm²]

In accordance to AFERA 5012

20° C 10

Temperature Resistance

- 40°C to +95°C, short term even up to +120°C

Storage. This product should be stored at ambient temperatures of around 20°C, avoiding wide temperature fluctuations and direct sunlight. The storage environment should have a relative humidity of approx. 50%. In ideal storage conditions, the shelf life of this material will be approx. 12 months from the delivery date. Within this 12 month period, when stored correctly, there should be no deterioration of the products published performance specification.

Product use. All statements, technical info contained herein are based on lab testing, we believe to be reliable. In reality, many factors beyond our control can affect and influence the use and performance of our products on any particular application. Since these factors are uniquely within the users knowledge and control, it is essential that the user evaluate the product to determine its suitability for purpose. Biolink will not be liable for any loss or damage arising, whether direct or indirect, special, incidental or consequential.

All data above mentioned and technical information given above are typical values, gained from tests we believe to be reliable. Please ensure before using. Our product that it is suitable for the material for intended application. For technical assistance please call our product specialists. The data and statements are intended as a source of information, are given without guarantee and do not constitute a warranty. They can vary according to the application conditions. All materials described herein are subject to our conditions of sale, a copy is available on request.